


# Quick Start Guide

## Generic Gateway/Console Configuration

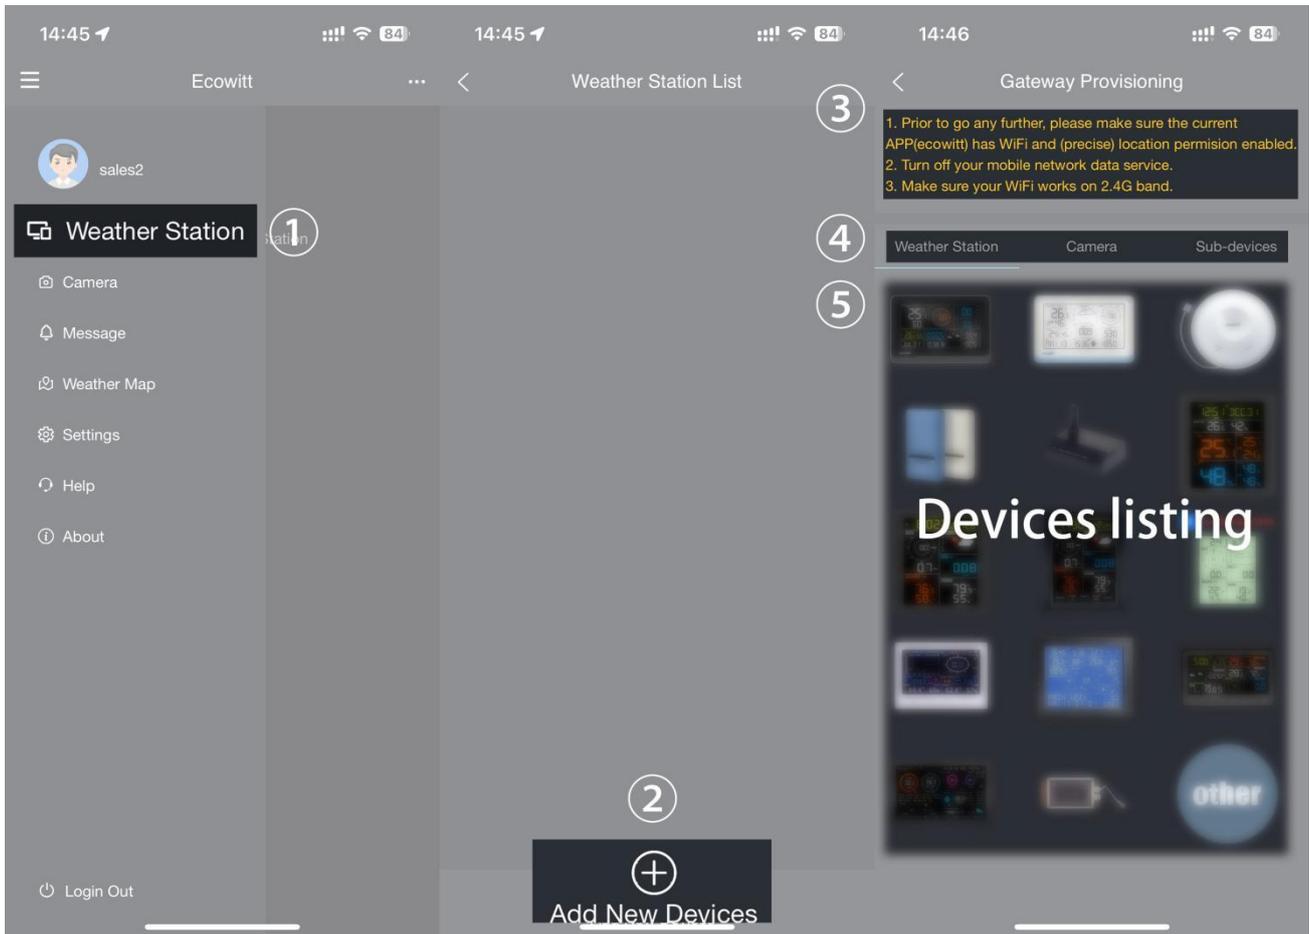

1. Install the "ecowitt" APP. Make sure you have the app with location and Wi-Fi services enabled.
2. Disable the cellular network data service on your mobile phone during the setup process (if you are using a mobile phone to run the ecowitt app).
3. Tap "menu" at the top left corner, then go to "My Devices" to select "+ Add New Devices" to initiate the Wi-Fi provisioning process.
4. Follow the instructions provided by the app, and if you encounter any issues, please contact our customer service department.

### For WS38X0/WS39X0 products:


#### Note:

- Wi-Fi will not activate when the device is powered by batteries alone.
- Use the 5V 1A power adapter to turn on the device. It will automatically enter pairing mode upon first startup.
- To ensure proper Wi-Fi functionality, always use the power adapter.


If you are unable to configure the device network settings using the mobile app, we recommend using the **SETUP Via Embedded Web** page on next page.

# SETUP Via Embedded Web page

1. The gateway/console will automatically enter network configuration mode for 5 minutes after powering on. If you are unable to complete the connection within this time, please power it on again and search for the Wi-Fi hot spot to connect.

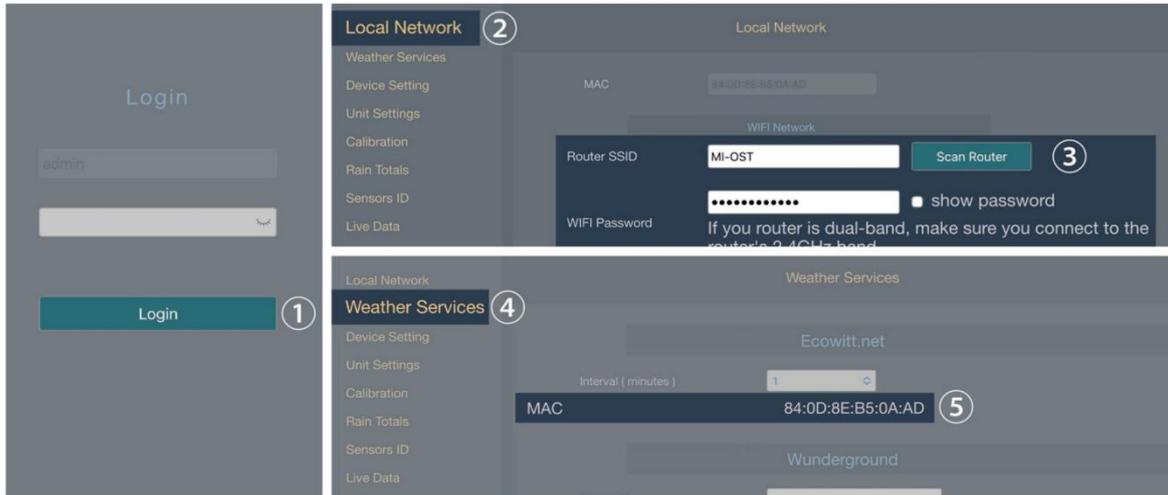

2. Go to your mobile phone browser, enter 192.168.4.1 to open the embedded web page. (The default password is empty, tap Login directly. )
3. Local Network -> Router SSID -> WIFI password -> Apply
4. Weather services -> Copy "MAC"

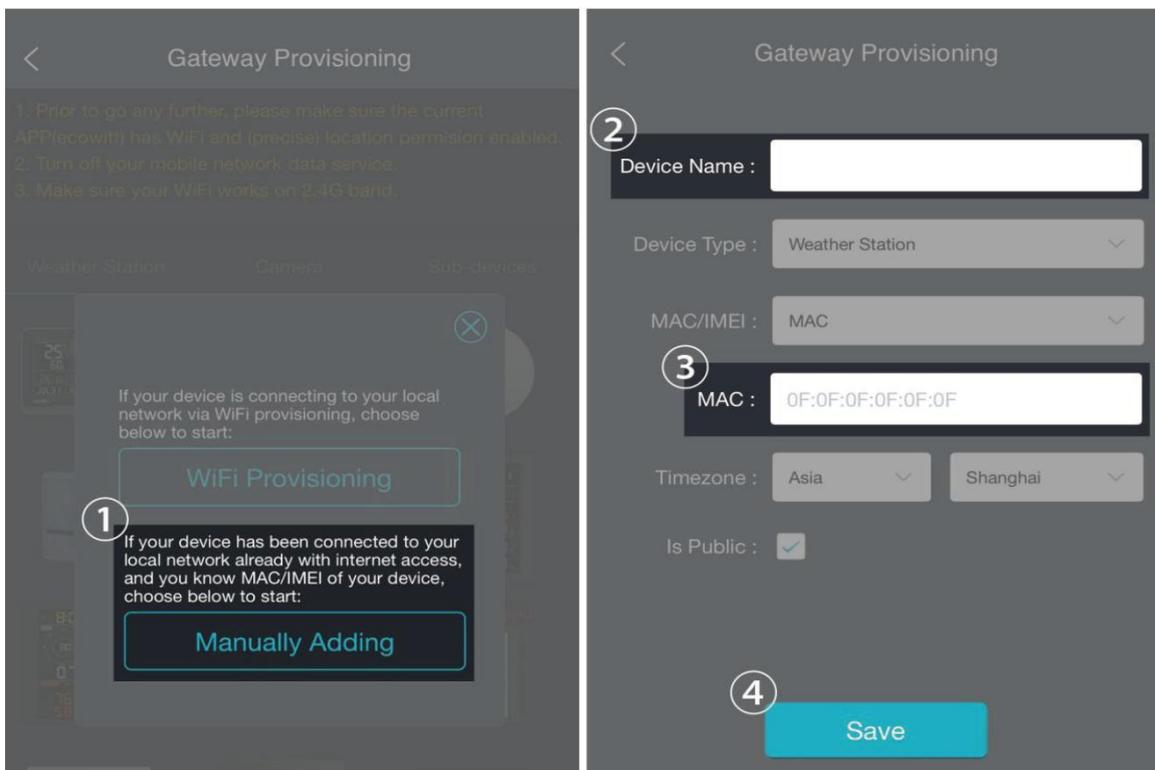

5. Return "Gateway provisioning" to choose "Manually adding" on mobile app. And then enter "Device Name" and paste "MAC" to save.