


Quick Start Guide

Generic Gateway/Console Configuration

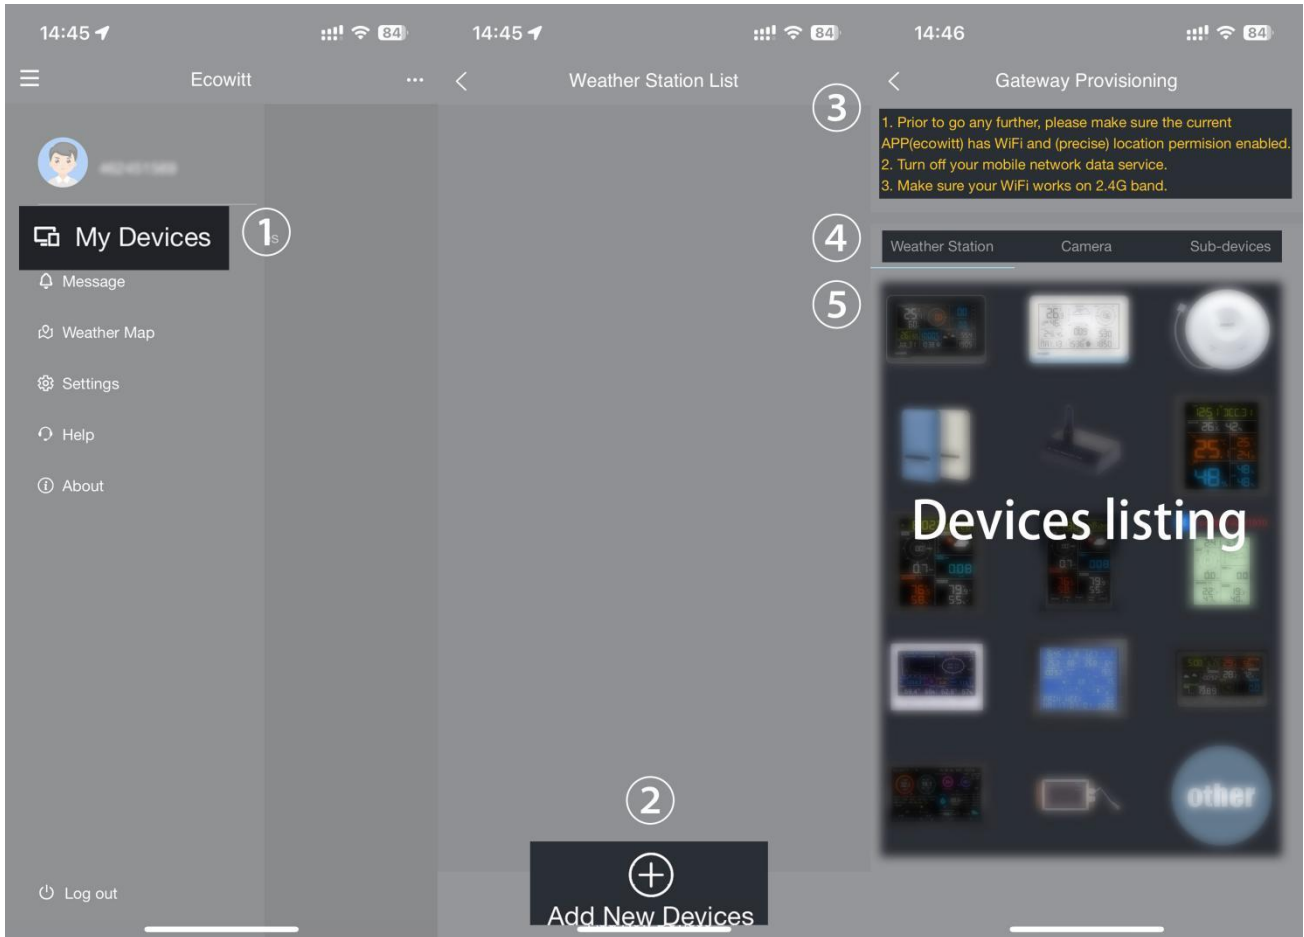


1. Install the "ecowitt" APP. Make sure you have the app with location and Wi-Fi services enabled.
2. Disable the cellular network data service on your mobile phone during the setup process (if you are using a mobile phone to run the ecowitt app).
3. Tap "menu" at the top left corner, then go to "My Devices" to select "+ Add New Devices" to initiate the Wi-Fi provisioning process.
4. Follow the instructions provided by the app, and if you encounter any issues, please contact our customer service department.


If you are unable to configure the device network settings using the mobile app, we recommend using the SETUP Via Embedded Web page on next page.

SETUP Via Embedded Web page

1. The gateway/console will automatically enter network configuration mode for 5 minutes after powering on. If you are unable to complete the connection within this time, please power it on again and search for the Wi-Fi hot spot to connect.

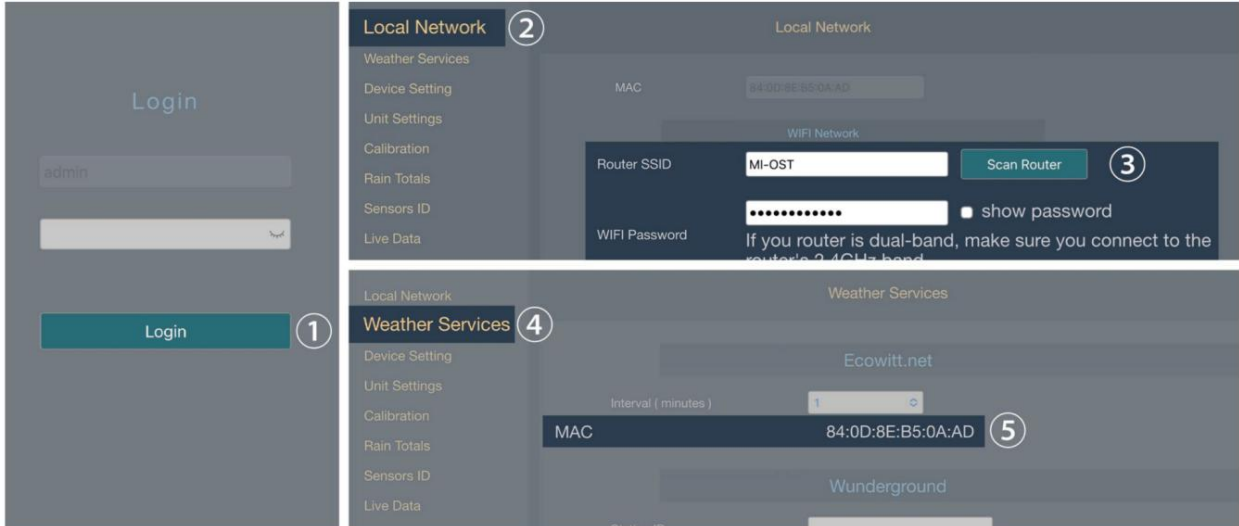

2. Go to your mobile phone browser, enter 192.168.4.1 to open the embedded web page. (The default password is empty, tap Login directly.)
3. Local Network -> Router SSID -> WIFI password -> Apply
4. Weather services -> Copy "MAC"

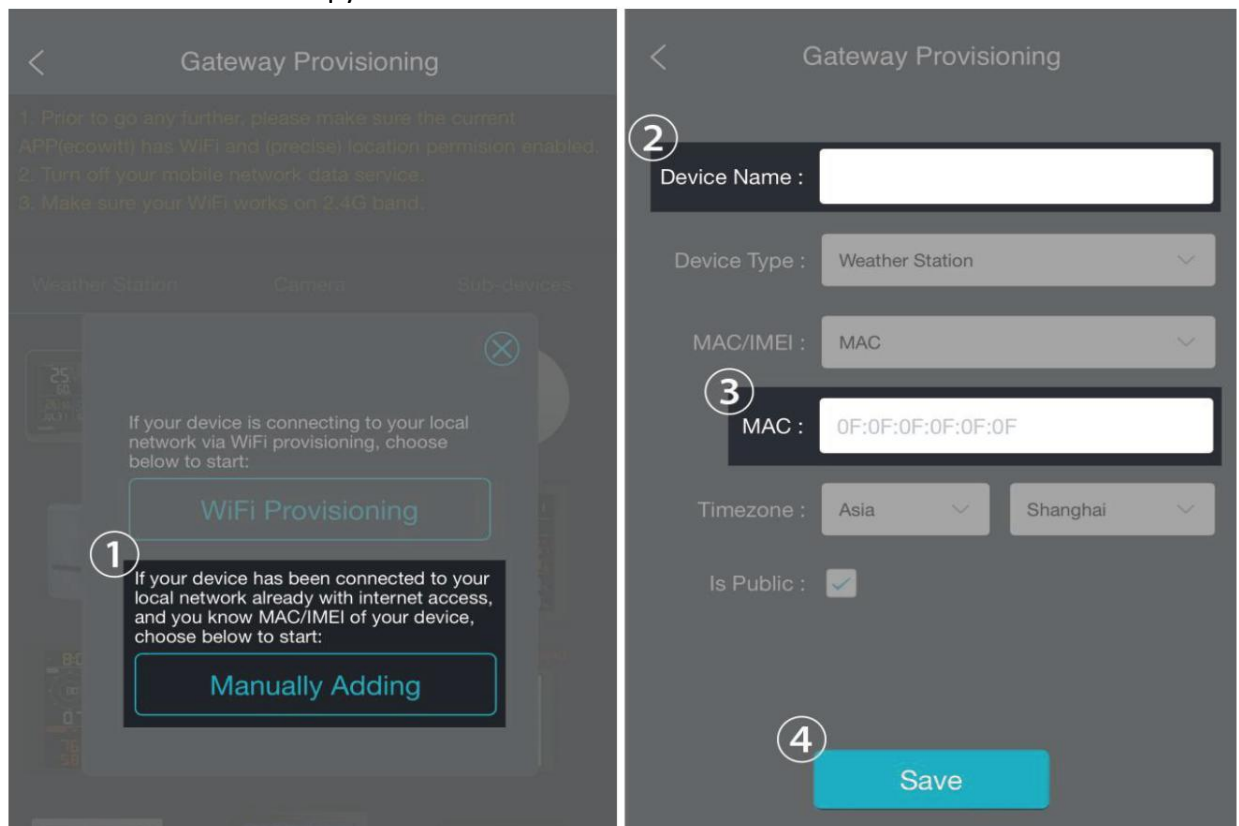

5. Return "Gateway provisioning" to choose "Manually adding" on mobile app. And then enter "Device Name" and paste "MAC" to save.